# U3-3142ACP-M Rev.1.2 (1008919)

In series
The model is in series and available for the long term.






## Specification

### Sensor

| | |
|---|---|
| Sensor type | CMOS Mono |
| Shutter | Global Shutter |
| Sensor characteristic | Linear |
| Pixel Class | 1.3 MP |
| Resolution | 1.31 Mpix |
| Resolution (h x v) | 1280 x 1024 Pixel |
| Aspect ratio | 5:4 |
| ADC | 10 bit |
| Color depth (camera) | 10 bit |
| Optical sensor class | 1/2" |
| Optical Size | 6.144 mm x 4.915 mm |
| Optical sensor diagonal | 7.87 mm 1/2" |
| Pixel size | 4.8 µm |
| CRA (Chief Ray Angle) | 2.7 ° |
| Manufacturer | Onsemi |
| Sensor Model | NOIP1SN1300A-QDI |
| Gain (master/RGB) | 16x/- |
| AOI horizontal | same frame rate |
| AOI vertical | increased frame rate |
| AOI image width / step width | 256 / 2 |
| AOI image height / step width | 1 / 1 |
| AOI position grid (horizontal/vertical) | 2 / 1 |
| Binning horizontal | - |
| Binning vertical | - |
| Binning method | Horizontal: addition / Vertical: addition |
| Binning factor | - |
| Decimation (subsampling) horizontal | - |
| Decimation (subsampling) vertical | - |
| Decimation (subsampling) method | M/C automatic |

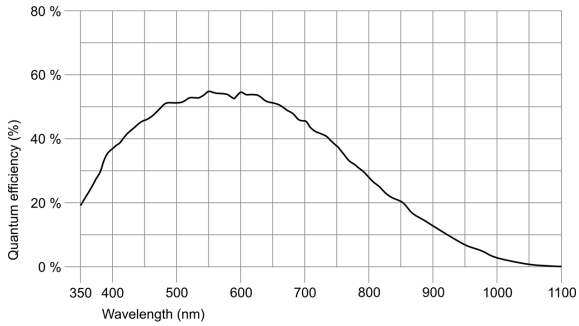



IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com

## Model

| | |
|---|---|
| Frame rate freerun mode | 172 fps |
| Frame rate trigger (continuous) | 172 fps |
| Frame rate trigger (maximum) | 172 fps |
| Exposure time (minimum - maximum) | 0.05 ms - 2000 ms |
| Line rate freerun mode (line scan) | 7826 1/s |
| Line rate trigger mode (line scan) | 7826 1/s |
| Lines per frame (line scan) | 8000 |
| Power consumption | 0 W - 0 W |
| Image memory | 128 MB |

## Ambient conditions


For PCB versions, refer to the separate hints in the respective documentation.

| | |
|---|---|
| Allowed device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F |
| Allowed device temperature during storage | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 % |

## Connectors

| | |
|---|---|
| Interface connector | Samtec LSHM 20-pin |
| I/O connector | 20-pin header (Samtec LSHM-110-L02.5-L-DV-A-N-K-TR) |
| Power supply | USB cable |

## Pin assignment I/O connector

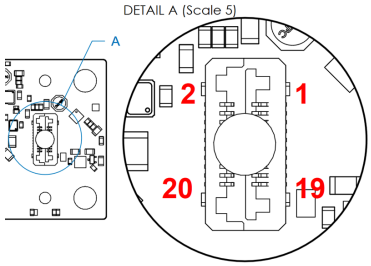


| | |
|---|---|
| 1 | Input power supply (VCC), 5 V DC USB |
| 2 | Do not connect (for future use) |
| 3 | Input power supply (VCC), 5 V DC USB |
| 4 | Do not connect (for future use) |
| 5 | USB 2 data (-) |
| 6 | I2C SDA (signal data) 3.3 V |
| 7 | USB 2 data (+) |
| 8 | I2C SCL (signal clock) 3.3 V |
| 9 | Ground (GND) |
| 10 | Trigger input without optocoupler 3.3 V |
| 11 | USB 3 TX (-) |
| 12 | Flash output without optocoupler 3.3 V 8 mA |
| 13 | USB 3 TX (+) |
| 14 | General Purpose I/O (GPIO) 1, 3.3 V |
| 15 | Ground (GND) |
| 16 | General Purpose I/O (GPIO) 2, 3.3 V |
| 17 | USB 3 RX (-) |
| 18 | Do not connect (for future use) |
| 19 | USB 3 RX (+) |
| 20 | Output power voltage, 5 V (900 mA – camera current depending on sensor) |

## Design

| | |
|---|---|
| Lens Mount | No mount |
| IP code | - |
| Dimensions H/W/L | 84.0 mm x 30.0 mm x 9.8 mm |
| Mass | 20 g |
| Housing material | - |



IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com

# Features

List of on-camera image pre-processing features.
All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

| | | |
|---|---|---|
| Image Acquisition | Freerun | ✓ |
| | Software trigger | ✓ |
| | Hardware trigger | ✓ |
| | Trigger controlled exposure | - |
| | Denoiser | ✓ |
| | Long exposure | - |
| | Line scan | ✓ |
| Flashing | Flashing | ✓ |
| | PWM flashing | ✓ |
| Image Adjustments | Auto exposure | ✓ |
| | Auto gain | ✓ |
| | Auto whitebalance | - |
| | Color correction | - |
| | Gamma | ✓ |
| | LUT | ✓ |
| | Mirror/flip | Y |
| On-board Image Processing | Pixel formats | Mono8<br>Mono10<br>Mono10p |
| | Region of interest | ✓ |
| | Decimation (FPGA) | ✓ |
| | Decimation (Sensor) | |
| | Binning (FPGA) | ✓ |
| | Binning (Sensor) | |
| Others | Chunks | - |
| | Sequencer | - |
| | Events | ✓ |
| | Firmware update | ✓ |
| | 1st supported firmware version | 2.20. |


IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com