





## U3-3252LE-C (AB00664)


**Discontinued**  
The model has been discontinued.



## Specification

### Sensor

|                                         |                      |
|-----------------------------------------|----------------------|
| Sensor type                             | CMOS Color           |
| Shutter                                 | Global Shutter       |
| Sensor characteristic                   | Linear               |
| Readout mode                            | Progressive scan     |
| Pixel Class                             | 1.9 MP               |
| Resolution                              | 1.92 Mpix            |
| Resolution (h x v)                      | 1600 x 1200 Pixel    |
| Aspect ratio                            | 4:3                  |
| ADC                                     | 10 bit               |
| Color depth (camera)                    | 10 bit               |
| Optical sensor class                    | 1/1.8"               |
| Optical Size                            | 7.200 mm x 5.400 mm  |
| Optical sensor diagonal                 | 9 mm (1/1.78")       |
| Pixel size                              | 4.5 $\mu$ m          |
| Manufacturer                            | e2v                  |
| Sensor Model                            | EV76C570ACT          |
| Gain (master/RGB)                       | 4x/4x                |
| AOI horizontal                          | same frame rate      |
| AOI vertical                            | increased frame rate |
| AOI image width / step width            | 80 / 2               |
| AOI image height / step width           | 60 / 2               |
| AOI position grid (horizontal/vertical) | 2 / 2                |
| Binning horizontal                      | same frame rate      |
| Binning vertical                        | same frame rate      |
| Binning method                          | M/C automatic        |
| Binning factor                          | 2                    |
| Subsampling horizontal                  | -                    |
| Subsampling vertical                    | -                    |
| Subsampling method                      | -                    |
| Subsampling factor                      | -                    |

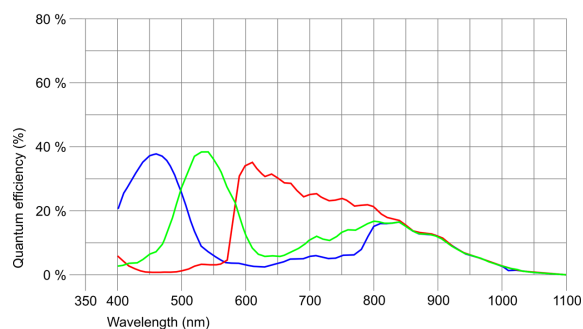

Subject to technical modifications (2024-04-26)



## U3-3252LE-C (AB00664)

### Model

|                                   |                    |
|-----------------------------------|--------------------|
| Frame rate freerun mode           | 40                 |
| Frame rate trigger (maximum)      | -                  |
| Exposure time (minimum - maximum) | 0.020 ms - 2000 ms |
| Power consumption                 | 1.3 W - 1.5 W      |

### Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.  
For PCB versions, refer to the separate hints in the respective documentation.


|                                     |                                 |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F   |
| Device temperature during storage   | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 %                     |

### Connectors

|                     |                                                              |
|---------------------|--------------------------------------------------------------|
| Interface connector | USB 3.0 micro-B                                              |
| I/O connector       | 8-pin plated-through holes (for connector 50 mil/RM 1,27 mm) |
| Power supply        | USB cable                                                    |

### Pin assignment I/O connector

|   |                                       |
|---|---------------------------------------|
| 1 | USB Power supply (VCC) 5 V            |
| 2 | USB Ground (GND)                      |
| 3 | Trigger input without optocoupler (+) |
| 4 | Flash output without optocoupler (+)  |
| 5 | General Purpose I/O (GPIO) 1          |
| 6 | General Purpose I/O (GPIO) 2          |
| 7 | I2C bus clock signal                  |
| 8 | I2C bus data signal                   |



Camera rear view

### Design

|                  |                            |
|------------------|----------------------------|
| Lens Mount       | -                          |
| IP code          | -                          |
| Dimensions H/W/L | 36.0 mm x 36.0 mm x 9.8 mm |
| Mass             | 8 g                        |

