

Not recommended for new designs  
The camera model is no longer recommended for new application development.




IDS peak uEye industrial cameras now also work with IDS peak! We recommend the Software Development Kit for the implementation of new projects. [Learn about the process here and switch now.](#)  
Please note: The technical data given here was measured using the IDS Software Suite.

Specification

Sensor

|                                         |                                                         |
|-----------------------------------------|---------------------------------------------------------|
| Sensor type                             | CMOS Color                                              |
| Shutter                                 | Global Shutter / Rolling shutter / Global Start Shutter |
| Sensor characteristic                   | Linear                                                  |
| Readout mode                            | Progressive scan                                        |
| Pixel Class                             | 1.9 MP                                                  |
| Resolution                              | 1.92 Mpix                                               |
| Resolution (h x v)                      | 1600 x 1200 Pixel                                       |
| Aspect ratio                            | 4:3                                                     |
| ADC                                     | 10 bit                                                  |
| Color depth (camera)                    | 12 bit                                                  |
| Optical sensor class                    | 1/1.8"                                                  |
| Optical Size                            | 7.200 mm x 5.400 mm                                     |
| Optical sensor diagonal                 | 9 mm (1/1.78")                                          |
| Pixel size                              | 4.5 µm                                                  |
| Manufacturer                            | e2v                                                     |
| Sensor Model                            | EV76C570ACT                                             |
| Gain (master/RGB)                       | 4x/4x                                                   |
| AOI horizontal                          | same frame rate                                         |
| AOI vertical                            | increased frame rate                                    |
| AOI image width / step width            | 16 / 4                                                  |
| AOI image height / step width           | 4 / 2                                                   |
| AOI position grid (horizontal/vertical) | 2 / 2                                                   |
| Binning horizontal                      | same frame rate                                         |
| Binning vertical                        | same frame rate                                         |
| Binning method                          | M/C automatic                                           |
| Binning factor                          | 2                                                       |
| Subsampling horizontal                  | -                                                       |
| Subsampling vertical                    | -                                                       |
| Subsampling method                      | -                                                       |
| Subsampling factor                      | -                                                       |

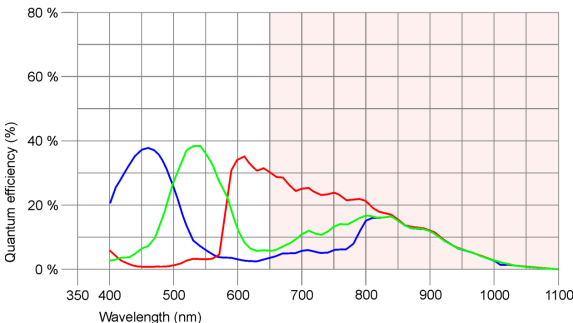

Subject to technical modifications (2024-04-24)

Model

|                                   |                                                                                                                                                 |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| Pixel clock range                 | 10 MHz - 112 MHz                                                                                                                                |
| Frame rate freerun mode           | 52                                                                                                                                              |
| Frame rate trigger (continuous)   | 52                                                                                                                                              |
| Frame rate trigger (maximum)      | 52                                                                                                                                              |
| Exposure time (minimum - maximum) | 0.020 ms - 1000 ms                                                                                                                              |
| Long exposure (maximum)           | 10000 ms                                                                                                                                        |
| Power consumption                 | 1.7 W - 2.4 W                                                                                                                                   |
| Image memory                      | 128 MB                                                                                                                                          |
| Special features                  | IDS line scan mode,<br>Scaler,<br>Sequencer,<br>Log mode,<br>Sensor hot pixel correction,<br>Fine exposure,<br>Sensor source gain,<br>Multi-AOI |

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


|                                     |                                 |
|-------------------------------------|---------------------------------|
| Device temperature during operation | 0 °C - 55 °C / 32 °F - 131 °F   |
| Device temperature during storage   | -20 °C - 60 °C / -4 °F - 140 °F |
| Humidity (relative, non-condensing) | 20 % - 80 %                     |

Connectors

|                     |                                           |
|---------------------|-------------------------------------------|
| Interface connector | GigE RJ45, screwable                      |
| I/O connector       | 8-pin Hirose connector (HR25-7TR-8PA(73)) |
| Power supply        | 12 V - 24 V or PoE                        |

Pin assignment I/O connector

|   |                                     |
|---|-------------------------------------|
| 1 | Ground (GND)                        |
| 2 | Flash output with optocoupler (-)   |
| 3 | General Purpose I/O (GPIO) 1        |
| 4 | Trigger input with optocoupler (-)  |
| 5 | Flash output with optocoupler (+)   |
| 6 | General Purpose I/O (GPIO) 2        |
| 7 | Trigger input with optocoupler (+)  |
| 8 | Input power supply (VCC) 12-24 V DC |



Camera rear view

Design

|                  |                             |
|------------------|-----------------------------|
| Lens Mount       | C-Mount                     |
| IP code          | IP30                        |
| Dimensions H/W/L | 34.0 mm x 44.0 mm x 47.0 mm |
| Mass             | 107 g                       |