IDS NXT rio Experience Kit 12 Monate (AS00032)


Discontinued
The model has been discontinued.



Specification

Sensor

Sensor type	CMOS Color
Shutter	Global Shutter
Sensor characteristic	Linear
Pixel Class	1.6 MP
Resolution	1.58 Mpix
Resolution (h x v)	1456 x 1088 Pixel
Aspect ratio	4:3
ADC	12 bit
Color depth (camera)	8 bit
Optical sensor class	1/2.9"
Optical Size	4.968 mm x 3.726 mm
Optical sensor diagonal	6.21 mm 1/2.9"
Pixel size	3.45 µm
CRA (Chief Ray Angle)	0 °
Manufacturer	Sony
Sensor Model	IMX273LQR-C
Gain (master/RGB)	24x/4x
AOI horizontal	-
AOI vertical	-
AOI image width / step width	- / -
AOI image height / step width	- / -
AOI position grid (horizontal/vertical)	- / -
Binning horizontal	-
Binning vertical	-
Binning method	-
Binning factor	-
Decimation (subsampling) horizontal	-
Decimation (subsampling) vertical	-
Decimation (subsampling) method	-

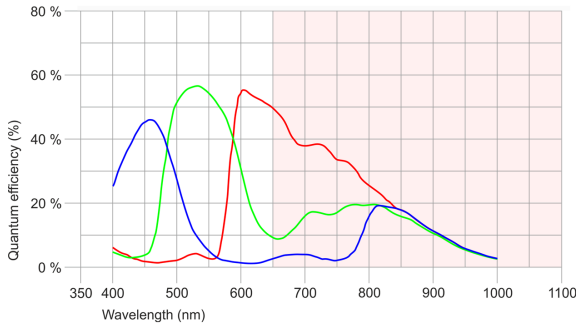

IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com

IDS NXT rio Experience Kit 12 Monate (AS00032)

Model

Frame rate freerun mode	34 fps
Frame rate trigger (continuous)	41 fps
Frame rate trigger (maximum)	41 fps
Exposure time (minimum - maximum)	0.035 ms - 2000 ms
Power consumption	5.4 W - 10 W
Image memory	128 MB

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Allowed device temperature during operation	0 °C - 55 °C / 32 °F - 131 °F
Allowed ambient temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	20 % - 80 %

Connectors

Interface connector	GigE RJ45, screwable
I/O connector	12-pin M12 connector (Attend 216A-12MSR)
Power supply	12 V - 24 V or PoE

Pin assignment I/O connector

1	Power supply 12-24 V DC (VBUS)
2	Reference level (ground) for power supply and RS-232 (VBUS GND)
3	Trigger input with optocoupler (Opto IN 0)
4	Input 1 with optocoupler (Opto IN 1)
5	Common reference level for all Opto IN (Opto IN COM)
6	Common reference level for all Opto OUT (Opto OUT COM)
7	Output 1 with optocoupler (Opto OUT 1)
8	Output 2 with optocoupler (Opto OUT 2)
9	Serial interface (RS232 RxD)
10	Serial interface (RS232 TxD)
11	Input 2 with optocoupler (Opto IN 2)
12	Flash output with optocoupler (Opto OUT 0)



Design

Lens Mount	C-Mount
IP code	IP30
Dimensions H/W/L	34.0 mm x 44.0 mm x 73.0 mm
Mass	0 g
Housing material	Aluminum

Features

List of on-camera image pre-processing features.
All features of the table are available via our IDS peak software for image pre-processing on the host computer (sensor model dependent).

Image Acquisition	Freerun	✓
	Software trigger	✓
	Hardware trigger	-
	Trigger controlled exposure	-
	Denoiser	-
	Long exposure	-
	Line scan	-

IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com

IDS NXT rio Experience Kit 12 Monate (AS00032)

Flashing	Flashing	✓
	PWM flashing	-
Image Adjustments	Auto exposure	-
	Auto gain	✓
	Auto whitebalance	✓
	Color correction	-
	Gamma	✓
	LUT	-
	Mirror/flip	X/Y
On-board Image Processing	Pixel formats	
	Region of interest	-
	Decimation (FPGA)	-
	Decimation (Sensor)	(2,4)x(2,4)
	Binning (FPGA)	✓
Others	Chunks	-
	Sequencer	-
	Firmware update	-
	1st supported firmware version	3.0

IDS Imaging Development Systems GmbH
Dimbacher Str. 10 · 74182 Obersulm · Germany · Phone +49 7134 96196-0 · E-mail info@ids-imaging.com